

GINELL

GINELL

2015-2016
TIRE CATALOG



CONTENT

As one of the members of Yinbao Tyre Group, the SNC tire factory has been opened with the most advanced and experienced tire technologies.

Development Positioning

Market Is Guidance.


UHP		HP			COMMERCIAL VAN		SUV			WINTER				
														
														
GN700	GN500	GN600	GN620	Sports K4	GN300	GN350	GN1000	GN2000	GN3000	GN900	GN930	GN950	GN360	GN970
Sport UHP	Comfort HP	Comfort HP	Economy HP	Comfort HP	Commercial VAN	Mini VAN	On&Off A/T	On-Road H/T	Off-Road M/T	Comfort Winter HP	Comfort Winter HP	Sport Winter SUV/SP	Economy Commercial/VAN	Comfort Studdable
														
PAGE:05-06	PAGE:07-08	PAGE:09-10	PAGE:11-12	PAGE:13-14	PAGE:15-16	PAGE:17-18	PAGE:19-20	PAGE:21-22	PAGE:23-24	PAGE:25-26	PAGE:27-28	PAGE:29-30	PAGE:31-32	PAGE:33-34

PRODUCT POSITIONING



CAR TIRE SERIES

- Sport
- Comfort
- Economy
- Off-Road

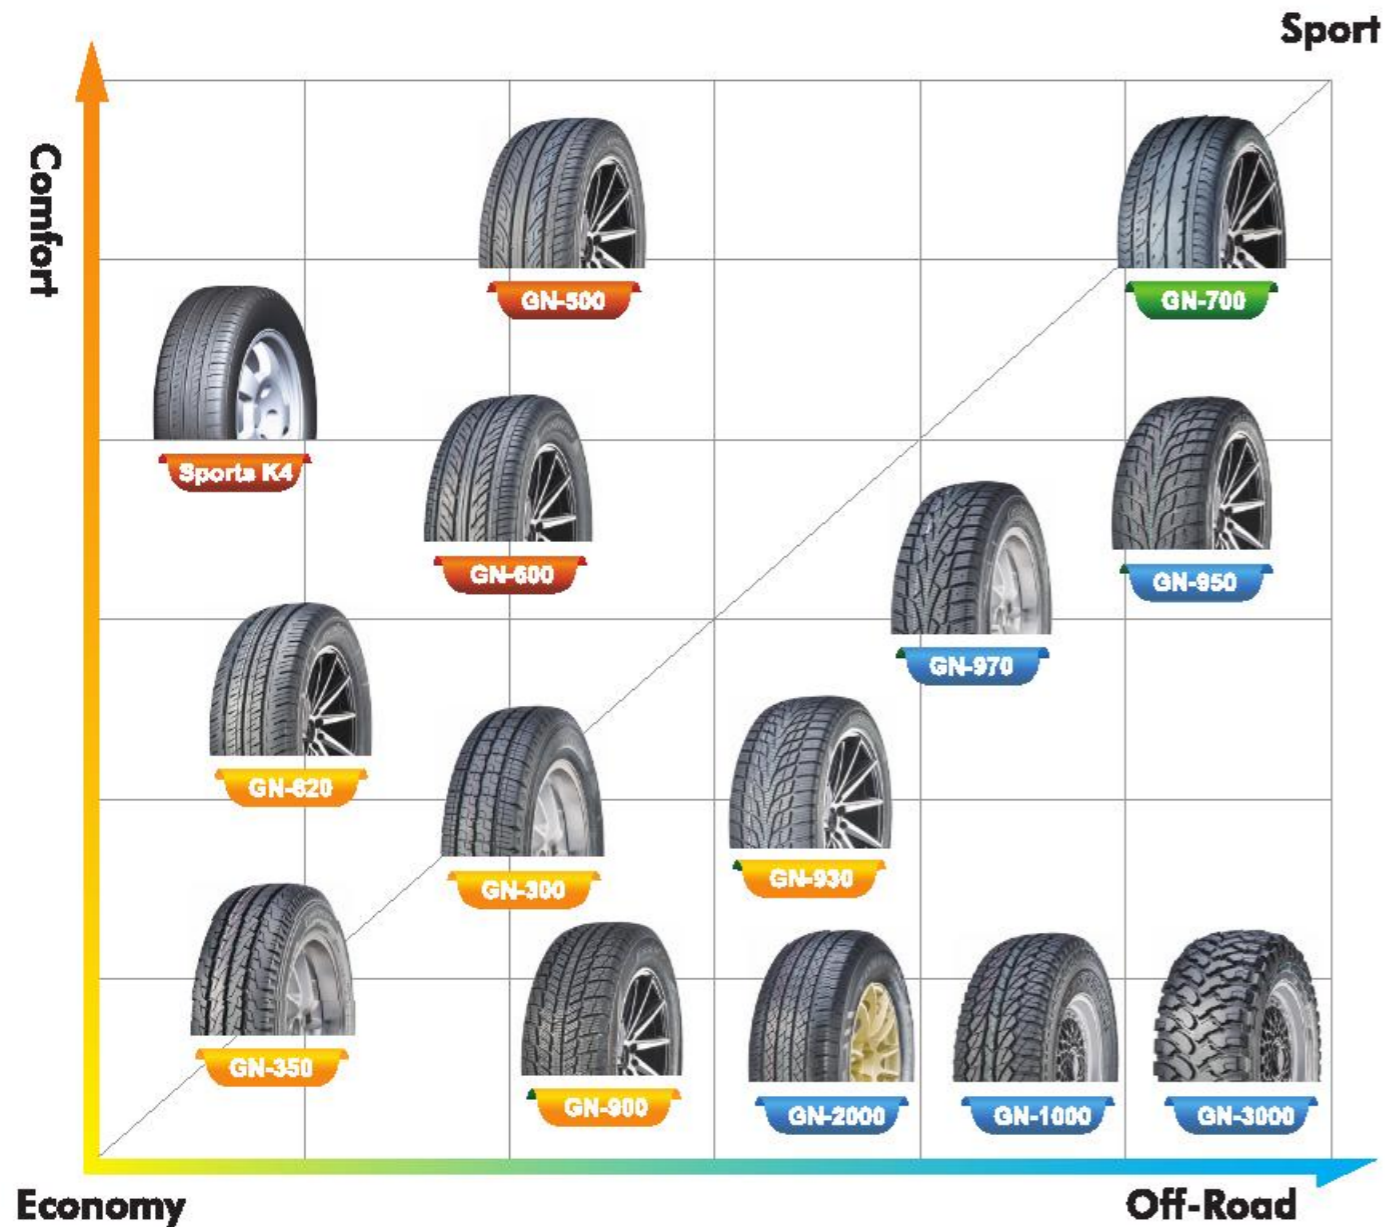

The excellent quality of GINELL tires will be perfectly tested on the stage of the racing field.



Dimensional Table of Product Series

Driving Smooth



GN700

UHP

Features and Benefits

Applicable models

Asymmetric Tread Design	4 circumferential straight grooves	Various sipes	Silica tread compound
<p>Inside for good water drainage. Outside for good riding stability and precise handling.</p>	<p>Ground</p> <p>For excellent water drainage and minimizes risk of aquaplaning at high speed.</p>	<p>On the tread and variable pitch on the shoulder blocks minimize noise level.</p>	<p>Silica formula</p> <p>For lower rolling resistance and excellent road holding.</p>

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max. Load (kg)	Max. Press (kPa)	UTQG
				OD	SW	NBD			
205/45ZR17	88W	XL	7.0	616	206	8.2	560	350	380 A A
215/45ZR17	91W	XL	7.0	626	213	8.2	615	350	380 A A
225/45ZR17	94W	XL	7.5	634	225	8.5	670	350	380 A A
235/45ZR17	97W	XL	8.0	644	236	8.5	730	350	380 A A
245/45ZR18	100W	XL	8.0	677	243	8.5	800	350	380 A A
245/45ZR19	102W	XL	8.0	703	243	8.5	850	350	380 A A
195/40ZR17	81W	XL	7.0	588	200	8.0	462	350	380 A A
205/40ZR17	84W	XL	7.5	596	212	8.5	500	350	380 A A
215/40ZR17	87W	XL	7.5	604	218	8.5	545	350	380 A A
245/40ZR17	95W	XL	8.5	628	248	8.5	690	350	380 A A
225/40ZR18	92W	XL	8.0	637	230	8.5	630	350	380 A A
235/40ZR18	95W	XL	8.5	645	241	8.5	690	350	380 A A
255/40ZR19	100W	XL	9.0	687	260	8.5	800	350	380 A A
275/40ZR19	105W	XL	9.5	703	278	8.5	925	350	380 A A
245/40ZR20	99W	XL	8.5	704	248	8.5	775	350	380 A A
215/35ZR18	84W	XL	7.5	607	218	8.5	500	350	380 A A
235/35ZR19	91W	XL	8.5	647	241	8.5	615	350	380 A A
225/35ZR20	90W	XL	8.0	668	230	8.5	600	350	380 A A
245/35ZR20	95W	XL	8.5	680	248	8.5	690	350	380 A A
275/35ZR20	102W	XL	9.5	700	278	8.5	850	350	380 A A
225/30ZR20	85W	XL	8.0	644	230	8.5	515	350	380 A A

GN700 UHP



M+S
 Rim Diameter Aspect Ratio Speed Rating
 17-20 45s-30s W



GN500

HP

Features and Benefits

Applicable models

Aggressive Uni-directional tread design



For excellent water evacuation and reduces aquaplaning at high speed.



Variable pitch



Combination on the shoulder blocks and sipes on the tread surface for quiet riding.

Solved Irregular wear



Newly developed directional tread design solved irregular wear.

Silica tread compound



For lower rolling resistance and excellent road holding.



GN500 HP



M+S

Rim Diameter

15-17

Aspect Ratio

55s-45s

Speed Rating

W/V

Size	L/SS	Std/XL	Rim	Dimensions (mm)			Max. Load (kg)	Max. Press (kPa)	UTQG
				OD	SW	NSD			
185/55R15	82V	Std	6.0	585	194	8.2	475	350	380 A A
195/55R15	85V	Std	6.0	595	201	8.2	515	350	380 A A
205/55R15	88V	Std	6.5	607	214	8.2	560	350	380 A A
195/55R16	87V	Std	6.0	620	201	8.2	545	350	380 A A
205/55R16	94W	XL	6.5	632	214	8.2	670	350	380 A A
205/55RF16	94W	XL	6.5	632	214	8.2	670	350	380 A A
215/55R16	97W	XL	7.0	642	226	8.2	730	350	380 A A
225/55R16	99W	XL	7.0	654	233	8.2	775	350	380 A A
205/55R17	95W	XL	6.5	658	214	8.2	690	350	380 A A
215/55R17	98W	XL	7.0	668	226	8.2	750	350	380 A A
225/55R17	101W	XL	7.0	680	233	8.2	825	350	380 A A
225/55RF17	101W	XL	7.0	680	233	8.2	825	350	380 A A
235/55R17	103W	XL	7.5	690	245	8.2	875	350	380 A A
195/50R15	82V	Std	6.0	577	201	8.0	475	350	380 A A
205/50R15	86V	Std	6.5	587	214	8.0	530	350	380 A A
185/50R16	81V	Std	6.0	592	194	8.0	462	350	380 A A
195/50R16	84V	Std	6.0	602	201	8.0	500	350	380 A A
205/50R16	87W	Std	6.5	612	214	8.2	545	350	380 A A
225/50R16	92W	Std	7.0	632	233	8.2	630	350	380 A A
205/50R17	93W	XL	6.5	638	214	8.2	650	350	380 A A
215/50R17	95W	XL	7.0	648	226	8.2	690	350	380 A A
225/50R17	98W	XL	7.0	658	233	8.2	750	350	380 A A
225/50RF17	98W	XL	7.0	658	233	8.2	750	350	380 A A
195/45R15	82V	XL	6.5	557	195	8.0	475	350	380 A A



GN600 HP



M+S

Rim Diameter	Aspect Ratio	Speed Rating
13-16	70s-60s	V/H/T



GN600

HP

Features and Benefits

Applicable models

Uni-directional tread design	Variable pitch	4 circumferential straight grooves.	Solved Irregular wear	Silica tread compound
<p>For excellent water evacuation and reduces squealing at high speed.</p>	<p>Combination on the shoulder blocks and sipes on the tread surface for quiet riding.</p>	<p>Ground</p>	<p>Newly developed directional tread design solved irregular wear.</p>	<p>For lower rolling resistance and lower fuel consumption.</p>

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max. Load (kg)	Max. Press (kPa)	UTQG
				OD	SW	NSD			
155/70R13	75T	Std	4.5	548	157	7.8	387	300	380 A A
165/70R13	79T	Std	5.0	562	170	7.8	437	300	380 A A
175/70R13	82H	Std	5.0	576	177	7.8	475	300	380 A A
165/70R14	81H	Std	5.0	588	170	7.8	462	300	380 A A
175/70R14	84H	Std	5.0	602	177	7.8	500	300	380 A A
185/70R14	88H	Std	5.5	616	189	8.0	560	300	380 A A
195/70R14	91H	Std	6.0	630	201	8.0	615	300	380 A A
215/70R15	98H	Std	6.5	683	221	8.2	750	300	380 A A
175/65R14	82H	Std	5.0	584	177	7.8	475	300	380 A A
185/65R14	86H	Std	5.5	596	189	8.2	530	300	380 A A
175/65R15	84H	Std	5.0	609	177	7.8	500	300	380 A A
185/65R15	88H	Std	5.5	621	189	8.2	560	300	380 A A
195/65R15	91H	Std	6.0	635	201	8.2	615	300	380 A A
205/65R15	94H	Std	6.0	647	209	8.2	670	300	380 A A
215/65R15	96H	Std	6.5	661	221	8.2	710	300	380 A A
185/60R14	82H	Std	5.5	578	189	8.2	475	300	380 A A
185/60R15	84H	Std	5.5	603	189	8.2	500	300	380 A A
195/60R15	88H	Std	6.0	615	201	8.2	560	300	380 A A
205/60R15	91H	Std	6.0	627	209	8.2	615	300	380 A A
215/60R15	94H	Std	6.5	639	221	8.2	670	350	380 A A
225/60R15	96V	Std	6.5	651	228	8.2	710	300	380 A A
195/60R16	89H	Std	6.0	640	201	8.2	580	300	380 A A
205/60R16	92H	Std	6.0	652	209	8.2	630	300	380 A A
215/60R16	95H	Std	6.5	664	221	8.2	690	300	380 A A
225/60R16	98V	Std	6.5	676	228	8.2	750	350	380 A A
235/60R16	100H	Std	7.0	688	240	8.2	800	300	380 A A




GN620

HP

Features and Benefits


Applicable models

3 wide straight grooves




Are designed for excellent water evacuation.

Deeper and wider tread design



For excellent riding stability, which ensures the safety and high mileage.

Reasonable pattern design



Are for increasing ground contact area and improving tire wear performance.

Special compound



Are adopted for excellent wear performance.

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)	UTQG
				OD	SW	NSD			
165/70R13	79T	Std	5.0	562	170	8.5	437	300	600 A A
175/70R14	84H	Std	5.0	602	177	8.5	500	300	600 A A
185/70R14	88H	Std	5.5	616	189	9.0	560	300	600 A A
155/65R13	73T	Std	4.5	532	157	8.5	365	300	600 A A
175/65R14	82H	Std	5.0	584	177	8.5	475	300	600 A A
185/65R14	86H	Std	5.5	596	189	9.0	530	300	600 A A
185/65R15	88H	Std	5.5	621	189	9.0	560	300	600 A A
195/65R15	91H	Std	6.0	635	201	9.0	615	300	600 A A
205/65R15	94H	Std	6.0	647	209	9.0	670	300	600 A A
185/60R14	82H	Std	5.5	578	189	9.0	475	300	600 A A
195/60R14	86H	Std	6.0	590	201	9.0	530	300	600 A A
195/60R15	88H	Std	6.0	615	201	9.0	560	300	600 A A
205/60R15	91H	Std	6.0	627	209	9.0	615	300	600 A A
205/60R16	92H	Std	6.0	652	209	9.0	630	300	600 A A
215/60R16	95H	Std	6.5	664	221	9.0	690	300	600 A A
195/55R15	85V	Std	6.0	595	201	9.0	515	300	600 A A
205/55R16	94V	XL	6.5	632	214	9.0	670	340	600 A A

GN620 HP



M+S

Rim Diameter Aspect Ratio Speed Rating
13-16 70s-55s V/H/T



Sports K4

HP

Features and Benefits

Applicable models

Concise and fluent lines




Are showing the flexible and artistic pattern.

New-type environmental protection compound



Are adopted to lower the rolling resistance, and reduce the fuel consumption.

3 straight main grooves and serial rib



Are for excellent riding stability under both dry and wet road conditions.

Optimized pitch arrangement



Minimizes the noise level.



Size	LI/SS	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)
			OD	SW	NSD		
165/60R15	77H	5.0	579	170	6.8	412	300
165/55R14	72V	5.0	538	170	6.8	355	300
165/55R15	75V	5.0	583	170	6.8	387	300
165/50R15	73V	5.0	547	170	6.8	365	300
165/45R15	68V	5.5	528	165	6.8	315	300

Sports K4 HP



M+S

Rim Diameter	Aspect Ratio	Speed Rating
14-15	60s-45s	V/H




GN300

Commercial/VAN

Features and Benefits

Applicable models

Wider tread




For more mileage and stable handling.

Stone ejectors




In main shoulder grooves for minimizing casing damage.

Sipes



On the center ribs and shoulder ribs provide excellent gripping on both dry and wet road conditions.

Shoulder protectors



Protect tire sidewall in rough road conditions.

Sidewall	Size	L/S	PR	Rim	OD	Dimensions (mm)		Max. Load (kg)		Max. Press (kPa)
						SW	NSD	Single	Dual	
	185R14C	102/100Q	8PR	5.5	650	188	10.8	850	800	450
WSW	185R14C	102/100Q	8PR	5.5	650	188	10.8	850	800	450
	195R14C	106/104Q	8PR	5.5	666	198	10.8	950	900	450
WSW	195R14C	106/104Q	8PR	5.5	666	198	10.8	950	900	450
	205R14C	107/106R	8PR	6.0	693	196	10.8	975	925	450
	195R15C	106/104R	8PR	5.5	693	196	10.8	950	900	450
WSW	195R15C	106/104R	8PR	5.5	693	196	10.8	950	900	450
WSW	205/75R14C	109/107R	8PR	5.5	664	203	10.3	1030	975	475
WSW	205/75R15C	110/108R	8PR	5.5	689	203	10.3	1060	1000	475
	185/75R16C	107/105R	8PR	5.0	684	184	9.3	900	850	475
	195/75R16C	107/105R	8PR	5.5	698	196	10.3	975	925	475
WSW	205/75R16C	110/108R	8PR	5.5	714	203	10.3	1060	1000	450
	195/70R15C	104/102R	8PR	6.0	655	201	10.3	900	850	450
WSW	205/70R15C	106/104R	8PR	6.0	669	209	10.3	950	900	450
	225/70R15C	112/110R	8PR	6.5	697	228	10.3	1120	1060	450
	195/65R16C	104/102R	8PR	6.0	660	201	10.3	900	850	475
	205/65R16C	107/105T	8PR	6.0	672	209	10.3	975	925	475
	215/65R16C	109/107T	8PR	6.5	686	221	10.3	1030	975	475
	225/65R16C	112/110T	8PR	6.5	698	228	10.3	1120	1060	475
	235/85R16C	115/113T	8PR	7.0	712	240	10.3	1215	1150	475

WSW: White Sidewall

GN300 Commercial/VAN



Rim Diameter 14-16
 Aspect Ratio 75s-65s
 Speed Rating T/R/Q



GN350 Mini VAN



M+S

Rim Diameter Aspect Ratio Speed Rating
13-14 70s-65s T/S/R/Q




GN350

Mini VAN

Features and Benefits

Applicable models

3 zigzag longitudinal grooves



For excellent water evacuation and improve tire flexibility.

Special structure design



Greatly improves the loading capacity.

Intensive sipes are designed



To minimize the noise level, and enhance heat dispersion performance, which will greatly ensure the driving safety.

Deeper and wider tread design



For excellent riding stability, which ensures the safety and high mileage.

Size	LI/SS	PR	Rim	Dimensions (mm)			Max.Load(kg)		Max.Press (kPa)
				OD	SW	NSD	Single	Dual	
155R13C	90/88S	8PR	4.5	578	157	10.0	600	560	450
165R13C	94/93S	8PR	4.5	594	165	10.0	670	650	450
165R14C	96/95S	8PR	4.5	620	165	10.0	710	690	450
165/70R13C	88/86S	6PR	5.0	562	170	10.0	560	530	375
165/70R14C	84/80S	6PR	5.0	588	170	10.0	500	450	350
175/70R14C	98/96R	8PR	5.0	602	177	10.0	750	710	450
185/70R14C	102/100Q	8PR	5.5	616	189	10.0	850	800	450
175/65R14C	90/88T	6PR	5.0	584	177	10.0	600	560	375



GN1000 A/T



M+S

Rim Diameter Aspect Ratio Speed Rating
15-20 85s-65s H/T/S/R



GN1000

A/T

Features and Benefits

Applicable models

Designed and built for all terrain use



On road driving considered high speed stability, off road driving, and strong traction. Given tough tread block.

Adopted special compound



For strong tread and high cut resistance performance.

3D block design



Enhances the grip ability on both wet and dry road, which could availablely protect the tread against injury under severe road conditions.

All series OWL design



Provides aesthetic of the tire.

Sidewall	Size	LI/SS	PR	Rim	Dimensions (mm)			Max.Load(kg)		Max.Press (kPa)	UTQG
					OD	SW	NSD	Single	Dual		
OWL	P215/75R15	102S/100S	—	6.0	703	216	10.5	790	—	300	420AB
OWL	P235/75R15	108S	—	6.5	733	235	10.8	920	—	300	420AB
OWL	P215/70R16	99T	—	6.5	708	221	10.5	775	—	300	420AB
OWL	P235/70R16	104T	—	7.0	736	240	10.8	900	—	300	420AB
OWL	P245/70R16	106S	—	7.0	750	248	10.8	950	—	300	420AB
OWL	255/70R16	111T	—	7.5	764	260	10.8	1090	—	300	420AA
OWL	P285/70R18	111T	—	8.0	778	272	10.8	1090	—	300	420AB
OWL	P285/65R17	110T	—	8.0	776	272	10.8	1060	—	300	420AB
OWL	255/60R18	112H	—	7.5	763	260	10.8	1120	—	300	420AA
OWL	235/85R16LT	120/116S	10PR	6.5	806	235	13.0	1380	1260	550	—
OWL	245/75R16LT	120/116S	10PR	7.0	774	248	13.0	1380	1260	550	—
OWL	265/75R16LT	123/120S	10PR	7.5	804	267	13.0	1550	1320	550	—
OWL	285/75R16LT	126/123S	10PR	8.0	834	286	13.0	1700	1550	550	—
OWL	265/70R16LT	121/118S	10PR	8.0	778	272	13.0	1450	1320	550	—
OWL	265/70R17LT	121/118S	10PR	8.0	804	272	13.0	1450	1320	550	—
OWL	285/70R17LT	121/118S	10PR	8.5	832	292	13.0	1450	1320	550	—
OWL	30 × 9.50R15LT	104R	6PR	7.5	750	240	13.0	900	—	350	—
OWL	31 × 10.50R15LT	109S	6PR	8.5	775	268	13.0	1030	—	350	—
OWL	35 × 12.50R17LT	121S	10PR	10.0	877	318	13.0	1450	—	450	—
OWL	35 × 12.50R18LT	123S	10PR	10.0	877	318	13.0	1550	—	450	—
OWL	35 × 12.50R20LT	121S	10PR	10.0	877	318	13.0	1450	—	450	—

OWL: Outlined White Letter



GN2000 H/T



M+S

Rim Diameter Aspect Ratio Speed Rating
14-20 75s-50s W/H/T/SN



GN2000

H/T


Features and Benefits

Applicable models

Designed for paved road use



Zigzag sipes on the shoulder block and tread



Are for reducing noise level and improving traction in both wet and dry conditions.

4 circumferential grooves



For excellent water evacuation for good wet traction.

Wider center rib



For stable handling at high speed straight line driving.

Size	LI/SS	Rim	Dimensions (mm)			Max.Load(kg)		Max.Press (kPa)	UTQG
			OD	SW	NSD	Single	Dual		
215/75R15	100H	6.0	703	216	8.5	800	—	300	420AA
225/75R15	102H	6.0	719	223	8.5	850	—	300	420AA
235/75R15	105H	6.5	733	235	8.5	925	—	300	420AA
265/75R16	116T	7.5	804	267	8.8	1250	—	300	420AA
205/70R14	95H	6.0	644	209	8.5	690	—	300	420AA
205/70R15	98H	6.0	669	209	8.5	710	—	300	420AA
215/70R16	100H	6.5	708	221	8.5	800	—	300	420AA
225/70R16	103H	6.5	722	228	8.5	875	—	300	420AA
235/70R16	106H	7.0	738	240	8.5	950	—	300	420AA
245/70R16	107H	7.0	750	248	8.5	975	—	300	420AA
265/70R16	111H	7.5	764	260	8.8	1090	—	300	420AA
265/70R16	112H/T	8.0	778	272	8.8	1120	—	300	420AA
275/70R16	114H/T	8.0	792	279	8.8	1180	—	300	420AA
205/65R16	95H	6.0	672	209	8.5	690	—	300	420AA
215/65R16	102H XL	6.5	686	221	8.5	850	—	340	420AA
225/65R17	102H	6.5	724	228	8.5	850	—	300	420AA
235/65R17	108H XL	7.0	738	240	8.5	1000	—	340	420AA
245/65R17	107H	7.0	750	248	8.5	975	—	300	420AA
265/65R17	110H	7.5	764	260	8.8	1060	—	300	420AA
265/65R17	112H	8.0	776	272	8.8	1120	—	300	420AA
275/65R17	119H XL	8.0	780	279	8.8	1360	—	340	420AA
285/65R17	116H	8.5	802	292	8.8	1250	—	300	420AA
275/65R18	116T/H	8.0	816	279	8.8	1250	—	300	420AA
205/60R16	92V	6.5	652	209	6.0	630	—	300	420AA
215/60R17	96V	6.5	690	221	6.5	710	—	300	420AA
225/60R17	103H XL	6.5	702	228	6.5	875	—	340	420AA
235/60R18	107H XL	7.0	739	240	6.5	975	—	340	420AA
265/60R18	114H XL	8.0	776	272	8.8	1120	—	300	420AA
275/60R20	115H	8.0	838	279	8.8	1215	—	300	420AA
235/55R17	103W XL	6.5	690	245	7.5	875	—	340	420AA
215/55R18	99W XL	6.5	693	228	7.0	775	—	340	420AA
235/55R18	104W XL	6.5	715	245	7.5	900	—	340	420AA
235/50R18	101W XL	7.5	693	245	6.5	825	—	340	420AA
245/70R17LT	119/116S 10PR	7.0	776	248	10.8	1360	1250	550	—
265/70R17LT	121/118S 10PR	8.0	804	272	10.8	1450	1320	550	—



GN3000

M/T



GN3000 M/T



M+S		
Rim Diameter	Aspect Ratio	Speed Rating
15-20	85s-55s	R/Q

Features and Benefits

Applicable models

Uni-directional tread design	Unique shoulder blocks, protection strip and 3D sidewall	Shoulder design	Special compound adopted
With large shoulder blocks and center blocks are for maximum traction in tough road condition.	Enhance traction in muddy conditions and snowy conditions.	For minimizing cut injury under severe road conditions.	For strong tread and high tear resistance performance.

Size	LI/SS	PR	Rim	Dimensions (mm)			Max.Load(kg)		Max.Press (kPa)
				OD	SW	NSD	Single	Dual	
255/65R19	111R	-	8.0	763	265	15.0	1090	-	340
215/85R16LT	115/112Q	10PR	6.0	778	216	14.0	1215	1120	550
235/85R16LT	120/116Q	10PR	6.5	812	235	15.0	1380	1260	550
215/75R15LT	100/97Q	6PR	6.0	709	216	14.0	800	730	350
235/75R15LT	104/101Q	6PR	6.5	739	235	14.0	900	825	350
225/75R16LT	115/112Q	10PR	6.0	750	223	14.0	1215	1120	550
245/75R16LT	120/116Q	10PR	7.0	780	248	15.0	1380	1280	550
265/75R16 LT	123/120Q	10PR	7.5	810	267	15.0	1550	1400	550
285/75R16LT	126/123Q	10PR	8.0	840	286	15.0	1700	1550	550
315/75R16LT	127/124Q	10PR	8.5	884	313	15.0	1750	1600	450
305/70R16LT	118/115Q	8PR	9.0	840	311	15.0	1320	1215	350
285/70R17LT	121/118Q	10PR	8.0	810	272	15.0	1450	1320	550
285/70R17LT	121/118Q	8PR	8.5	838	292	15.0	1450	1320	550
285/65R18LT	125/122Q	10PR	9.0	833	292	15.0	1650	1500	550
31 x 10.50R15LT	109Q	6PR	8.5	781	268	15.0	1030	-	350
32 x 11.50R15LT	113Q	6PR	9.0	807	290	15.0	1150	-	350
33 x 12.50R15LT	108Q	6PR	10.0	832	318	15.0	1000	-	250
33 x 12.50R17LT	114Q	8PR	10.0	832	318	15.0	1180	-	350
33 x 12.50R18LT	118Q	10PR	10.0	832	318	15.0	1320	-	450
33 x 12.50R20LT	114Q	10PR	10.0	832	318	15.0	1180	-	450
35 x 12.50R17LT	121Q	10PR	10.0	883	318	16.0	1450	-	450
35 x 12.50R18LT	123Q	10PR	10.0	883	318	16.0	1550	-	450
35 x 12.50R20LT	121Q	10PR	10.0	883	318	16.0	1450	-	450
35 x 13.50R20LT	124Q	10PR	10.0	883	345	16.0	1600	-	450



GN900

Winter HP

Features and Benefits


Applicable models

Directional tread design




Provides excellent gripping power on icy or snowy road and provide good adhesion with the road surface.

Special silica tread compound



Provides good traction on icy or snowy roads.

Thousand of zigzag sipes

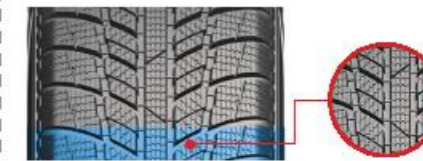

On the tread catch road surface of icy or snowy and provide good adhesion with the road surface.

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max. Load (kg)	Max. Press (kPa)
				OD	SW	NSD		
185/65R14	86T	Std	5.5	596	189	9.3	530	300
185/65R15	88H	Std	5.5	621	189	9.3	560	300
195/65R15	95T	XL	6.0	635	201	9.3	690	300
205/65R15	94H	Std	6.0	647	209	9.3	670	300
215/65R16	98H	Std	6.5	686	221	9.3	750	300



GN900 Winter HP



M+S

Rim Diameter	Aspect Ratio	Speed Rating
14-16	65s	H/T



GN930 Winter HP



M+S

Rim Diameter

13-17

Aspect Ratio

70s-50s

Speed Rating

H/T



GN930

Winter HP

Features and Benefits

Applicable models

Special Y-style directional pattern design




Will be excellent to improve the handling stability in ice-snow road conditions.

Open grooves



For effective water evacuation, greatly reduce the hydroplaning, and ensure the safety on ice-snow road.

High density 3D sipes on the tread pattern



Ensure the general rigidity of the tread, improve the adhesive power between wheel and the ice-snow ground, and strengthen the holding ability.

Advanced silica compound



Enhances the traction and balance in winter driving conditions.

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)
				OD	SW	NSD		
165/70R13	79T	Std	5.0	562	170	8.4	437	300
165/70R14	81T	Std	5.0	588	170	8.4	462	300
175/70R14	88T	XL	5.0	602	177	8.4	560	340
185/70R14	88T	Std	5.5	616	189	8.5	560	300
175/65R14	82T	Std	5.0	584	177	8.4	475	300
185/65R14	86T	Std	5.5	596	189	8.5	530	300
175/65R15	84T	Std	5.0	609	177	8.4	500	300
185/65R15	88T	Std	5.5	621	189	8.5	560	300
195/65R15	91T	Std	6.0	635	201	8.7	615	300
205/65R15	94T	Std	6.0	647	209	8.7	670	300
185/60R14	82T	Std	5.5	578	189	8.5	475	300
185/60R15	88H	XL	5.5	603	189	8.5	560	340
195/60R15	88H	Std	6.0	615	201	8.7	560	300
205/60R16	96H	XL	6.0	652	209	8.7	710	340
215/60R16	99H	XL	6.5	664	221	8.7	775	340
195/55R15	85H	Std	6.0	595	201	8.7	515	300
195/55R16	91H	XL	6.0	620	201	8.7	615	340
205/55R16	91T	Std	6.5	632	214	9	615	300
215/55R16	97H	XL	7.0	642	226	8.7	730	340
225/55R16	99H	XL	7.0	654	233	8.7	775	340
215/55R17	98H	XL	7.0	668	226	8.7	750	340
225/55R17	101H	XL	7.0	680	233	8.7	825	340
195/50R15	82H	Std	6.0	577	201	8.7	475	300
205/50R17	93H	XL	6.5	636	214	8.7	650	340
225/50R17	98H	XL	7.0	658	233	8.7	750	340



GN950 Winter SUV/UHP



M+S

Rim Diameter	Aspect Ratio	Speed Rating
16-19	70s-40s	V/H/T



GN950

Winter SUV/UHP

Features and Benefits

Applicable models

Y-style directional pattern design



Will be excellent to improve the handling stability in ice-snow road conditions.

Well-designed footprint



For excellent handling ability in both ice-snow and dry-wet road conditions.

High density 3D sipes



Are designed to strengthen the pattern rigidity, and provide excellent grip performance on the ice land.

Advanced silica compound



Enhances the traction and balance in winter driving conditions.

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)
				OD	SW	NSD		
215/70R16	100T	Std	6.5	708	221	8.7	800	300
245/70R16	111T	XL	7.0	750	248	9.2	1090	340
215/65R16	98H	Std	6.5	686	221	8.7	750	300
225/65R17	106H	XL	6.5	724	228	8.7	950	340
235/65R17	108H	XL	7.0	736	240	9.5	1000	340
265/65R17	112T	Std	8.0	776	272	9.2	1120	300
215/60R17	96H	Std	6.5	690	221	8.7	710	300
225/60R17	99H	Std	6.5	702	228	9.0	775	300
235/60R17	102H	Std	7.0	714	240	9.2	850	300
235/60R18	107H	XL	7.0	739	240	9.2	975	340
255/55R18	109H	XL	8.0	737	265	9.2	1030	340
255/50R19	107V	XL	8.0	739	265	9.2	975	340
225/45R17	94H	XL	7.5	634	225	9	670	340
245/45R18	100V	XL	8.0	677	243	9.2	800	340
225/40R18	92V	XL	8.0	637	230	9	630	340




GN360

Winter
Commercial/VAN

Features and Benefits


Applicable models  

4 straight main grooves




Are for excellent riding stability in both dry and wet road conditions.

Open grooves



For effective water evacuation, greatly reduce the hydroplaning, and ensure the safety on ice-snow road.

High density zigzag 3D sipes on shoulder blocks



Are for enhancing the friction and improving road holding ability on ice-snow road.

Deeper and wider tread design




For excellent riding stability, which ensures the safety and high mileage.

Size	LI/SS	PR	Rim	Dimensions (mm)			Max.Load (kg)		Max.Press (kPa)
				OD	SW	NSD	Single	Dual	
185/75R16C	104/102R	8PR	5.0	684	184	9.0	900	850	475
195/75R16C	107/105R	8PR	5.5	698	196	9.5	975	925	475
195/70R15C	104/102R	8PR	6.0	655	201	9.5	900	850	450
215/70R15C	109/107R	8PR	6.5	683	221	9.5	1030	975	450
225/70R15C	112/110R	8PR	6.5	697	228	9.5	1120	1060	450
195/65R16C	104/102R	8PR	6.0	680	201	9.5	900	850	475
205/65R16C	107/105R	8PR	6.0	672	209	9.5	975	925	475
215/65R16C	109/107R	8PR	6.5	686	221	9.5	1030	975	475
235/65R16C	115/113R	8PR	7.0	712	240	9.5	1215	1150	475

GN360 Winter Commercial/VAN



M+S 

Rim Diameter	Aspect Ratio	Speed Rating
15-16	75s-65s	R



GN970 Winter Studdable



M+S

Rim Diameter	Aspect Ratio	Speed Rating
15-16	75s-65s	T/R




GN970

Winter Studdable

Features and Benefits

Applicable models

Special Y-style directional pattern design



Will be excellent to improve the handling stability in ice-snow road conditions.

Multi-row studdable design in shoulder blocks



Provides general tread rigidity and excellent steering stability on ice-snow road.

High density 3D sipes



Are designed to strengthen the pattern rigidity, and provide excellent grip performance on the ice land.

Advanced silica compound



Enhances the traction and balance in winter driving conditions.

Size	LI/SS	Rim	Dimensions (mm)			Max.Load(kg)		Max.Press (kPa)
			OD	SW	NSD	Single	Dual	
195/65R15	91T	6.0	635	201	10.2	615	-	300
185/75R16C 8PR	104/102R	5.0	684	184	10.5	900	850	475