





HD RIM GUARD

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	at 15 kmph / 10 mph			at 10 kmph / 5 mph		
						Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)	Maximum Load Kgs.	Inflation Pressure (psi)	Inflation Pressure (bar)
10-16.5 TL	Mini Loader	10	267	795	28	1685	75	5.2	2135	75	5.2
10-16.5 TL	Mini Loader	14	267	795	28	1685	75	5.2	2360	75	5.2



AIR BOSS

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	at 15 kmph / 10 mph			at 10 kmph / 5 mph		
						Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)	Maximum Load Kgs.	Inflation Pressure (psi)	Inflation Pressure (bar)
6.50-10	Fork Lift	12	185	593	11	1500	112	7.75	1950	112	7.8
7.00-12	Fork Lift	12	185	593	11	2060	123	8.5	2680	123	8.5

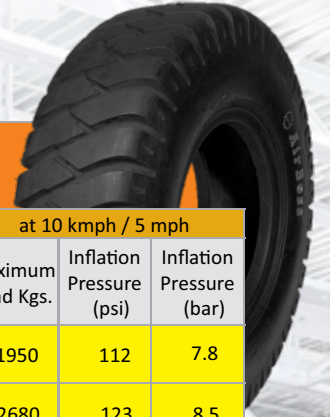

LIFT TRAX


Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	at 15 kmph / 10 mph			at 10 kmph / 5 mph		
						Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)	Maximum Load Kgs.	Inflation Pressure (psi)	Inflation Pressure (bar)
7.00-12	Fork Lift	12	194	685	15.5	2060	123	8.5	2680	123	8.5





G2/L2 GRIPSTER 101

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	at 50 kmph			at 10 kmph		
						Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (kPa)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (kPa)
13.00-24	Industrial	12	350	1295	21	3000	44	300	5600	65	450
13.00-24	Industrial	16	350	1295	21	3580	58	400	6500	87	600
14.00 24	Industrial	12	380	1350	24.5	3350	40	275	6300	62	425
14.00 24	Industrial	16	380	1350	24.5	4000	54	375	7300	80	550



ITL 703

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	at 15 kmph / 10 mph			at 10 kmph / 5 mph		
						Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
10-16.5 TL	Loader	12	259	798	35	2185	75	5.17	2765	75	5.17
10-16.5 TL	Loader	14	259	798	35	1685	75	5.17	2360	75	5.17



ITL 718 (SKID STEER)

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	at 15 kmph / 10 mph			at 10 kmph / 5 mph		
						Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
10-16.5 TL	Mini Loader	8	265	800	14	1480	61	4.2	1878	61	4.2
10-16.5 TL	Mini Loader	10	265	800	14	1685	75	5.2	2135	75	5.2
10-16.5 TL	Mini Loader	12	265	800	14	2185	75	5.2	2765	75	5.2
12/16.5 TL	Mini Loader	10	327	850	21.5	2010	65	4.5	2540	65	4.5
12/16.5 TL	Mini Loader	12	327	850	21.5	2265	80	5.5	2865	80	5.5



ITL 718 (MPT)

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	at 15 kmph / 10 mph			at 10 kmph / 5 mph		
						Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
12.5/80-18 TL	Industrial	12	310	990	26	2650	54	3.7	1850	54	3.7
--''--	--''--	14	310	990	26	3000	62	4.3	2120	62	4.3
--''--	--''--	16	310	990	26	3150	71	4.9	2180	71	4.9